





When installing the device on irregularly shaped surfaces the use of chain or tape to connect the legs may be problematic. It is permissible to use bracing in the form of additional pipes with diameters from 48.3mm to 60mm connecting individual legs by means of rotating **SPC pipe connectors**.

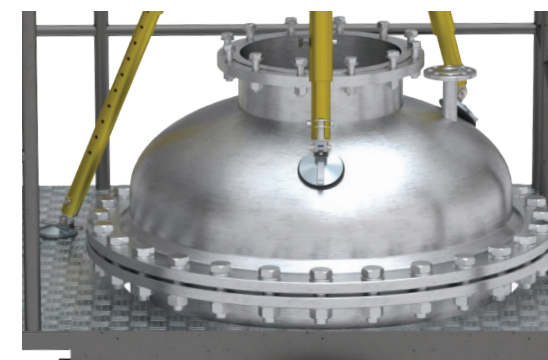

SPC pipe connector

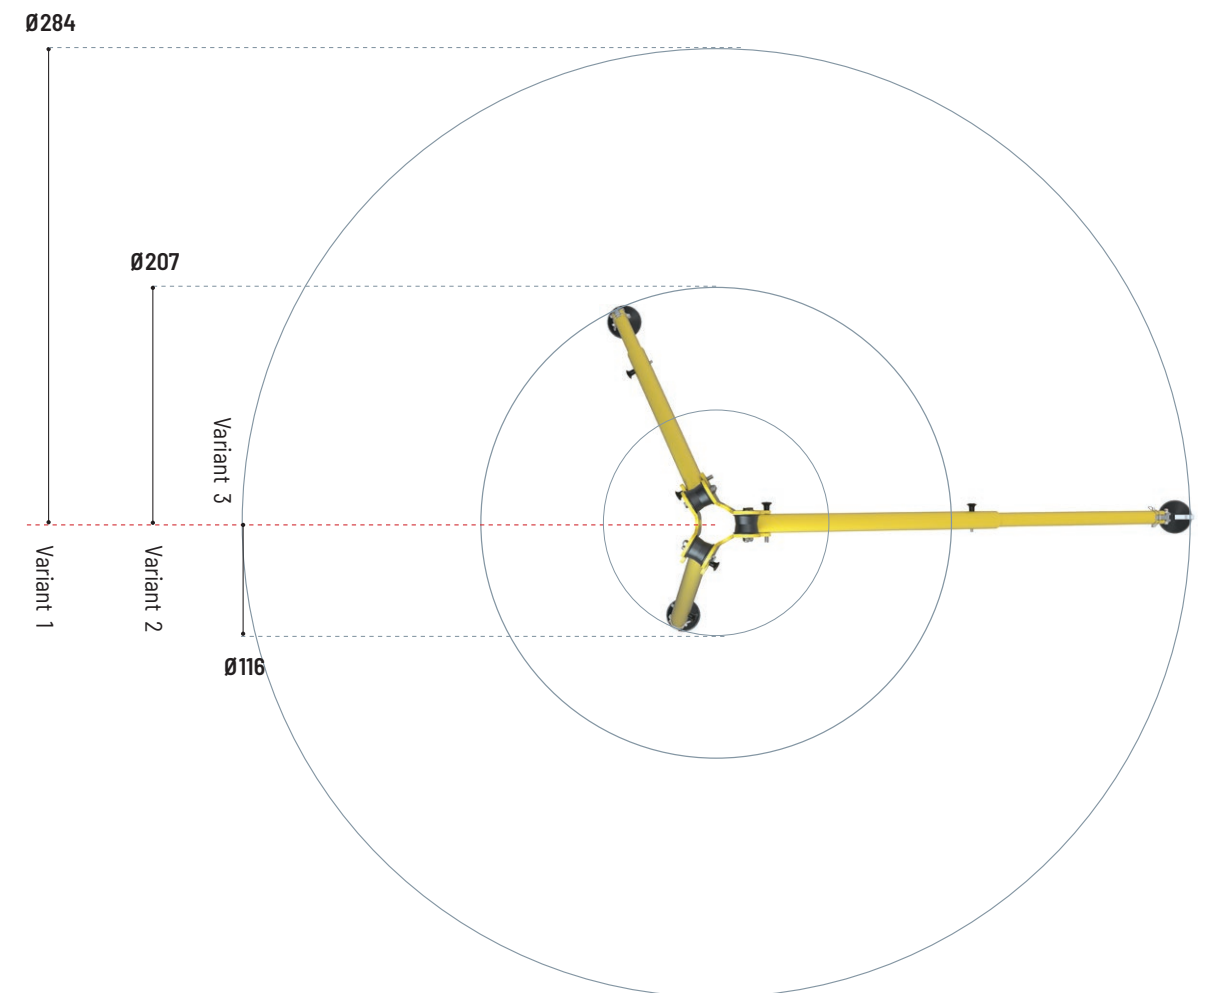

Tm 16 tripod set up on a stainless steel tank. The tripod is fixed to the ground by means of swinging feet with suction cups, enabling precise adjustment of the work station to environmental conditions.

