
DOUBLE WEBBING WITH ABSORBER
80228

1,78 m: fully stretched / **1,37 m:** at rest

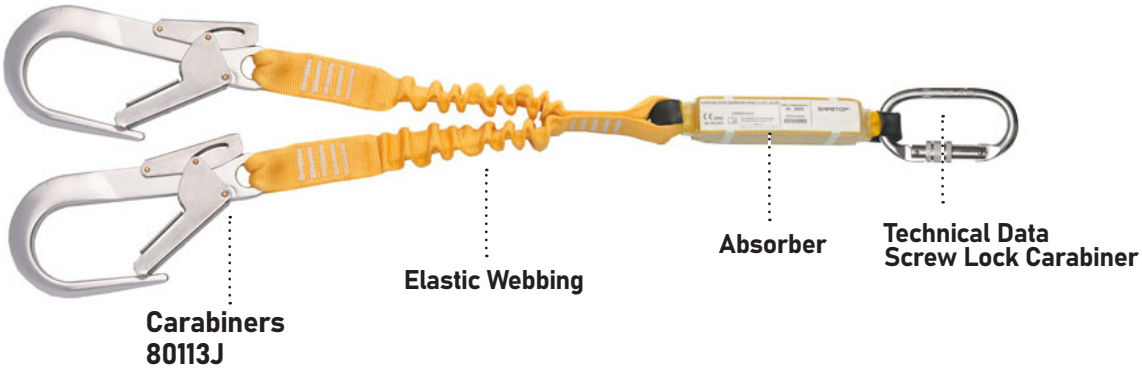

PRODUCT SPECIFICATIONS

CE

EN354: 2010
EN362: 2004
EN355: 2002

MATERIALS
Polyester rope
Steel carabiners

APLICATIONS
Ideal for work on scaffolding, structures, and ladders, among other applications.

LIFETIME

Inspections: The equipment must be inspected every 12 months by an authorized person or the manufacturer. Inspections should be recorded on the inspection sheet attached to the PPE, along with the instruction manual.

The maximum service life is up to 10 years from the date of manufacture for plastics and textile products. It is indefinite for metal products.

Cleaning: Clean with water and soap not exceeding 30°C. Do not dry with heat. Occasionally grease the hinges and opening levers after washing.

FEATURES

+ Category III PPE
+ Energy absorber with double elastic rope and carabiners
+ Total length of the stretched equipment: 1.5 m, including connectors
+ Length without carabiners: 80 cm+ Incluye absorbedor, hecho
+Includes an absorber made of 34 mm wide polyester webbing
+ Absorber dimensions: 230 mm (length) x 34 mm (width) x 32 mm (height). It is equipped with protected loops at the ends. Protected with a polyethylene tube. Maximum elongation of the absorber: 1.75 m
+ Double elastic polyester webbing rope, 40 mm wide, with loops at the ends
+ At one end, a 80112J steel screw connector, with a 19 mm opening and 25 kN strength
+ At the other end, two 80113J galvanized steel hooks, with a 56 mm opening. No spare parts are supplied

TECHNICAL DATA	
Total stretched length	1,78 m
Length at rest	56 mm
Max. elongation of the absorber	1,75 m
Static strength	15 kn
Absorber dimensions	230x34x32 mm
Width of the elastic webbing	40 mm
Breaking tenacity of the fibers	0,6 N/tex
Total weight (with carabiners)	1550 g aprox

TECHNICAL DATA CARABINER 80113J	
Material	Steel
Strength	56 mm
Strength	217x118 mm
Strength	25 kn
Weight	460 g
Standard	EN362 A

TECHNICAL DATA CARABINER 80112J	
Material	Steel
Strength	19 mm
Strength	108x60 mm
Strength	25 kn
Weight	170 g
Standard	EN362 B

+34 981 64 98 11
pedidos@safetop.net

SAFETOP®
Rúa O Morrazo, 2 - 15171 - Iñás
(Oleiros, A Coruña) SPAIN