



SPILO-S2




INTEGRATED ENERGY ABSORBER



①




②

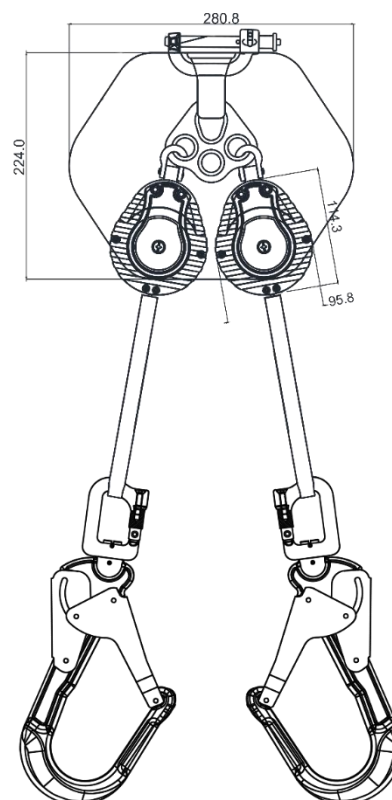

HS CODE
84798997
CARTON SIZE / PCS.
60x40x24 cm / 3
AET N°PPE-3223-23766-Cert
ANCCP Certification Agency S.r.l. N°0302 Via dello Struggino, 6 57121 LIVORNO (LI) - Italy
MODULE D FI14/14003.02
SGS Fimko Oy, N°0598 Takomotie 8, 00380 HELSINKI, Finland

REF.	FA 20 505 02A
LG. 	2.40 m
KG	MAX. 140 KG
CE	EN 360:2023
MAT. 	Polyamide 6 - 30% fiber glass
	Polyamid 21 mm
	 DOUBLE ACTION
	2x2
R(kN)	15 kN
	YES
	2.95 KG

 Longueur Poids maxi utilisateur Length Max. user weight Longitud Peso máximo del usuario Lunghezza Peso Max. dell'utente Länge Höchstgewicht des Benutzers	 MAT. Matière carter / sangle Material of casing / webbing Material cárter / correa Material dei carter / Cinghia Material Gehäuse / Gurt	 Matière connecteur haut / connecteur bas Material of top connector / bottom connector Material conector alto / conector bajo Materiale connettore alto / connettore basso Material oberes / unteres Verbindungselement
 Nombre d'émerillons Number of swivels Cantidad de eslabones giratorios Numero di tornichetti Anzahl der Wirbel	 Homologué pour le travail à proximité d'arêtes vives Approved for work near sharp edges Homologado para trabajo cerca de aristas vivas Omologato per lavoro in prossimità di spigoli vivi Zugelassen für Arbeiten in der Nähe scharfer Kanten	