

TRAPEZOIDAL ROOF



I-BEAM


**WOODEN
BEAM**



KS 4000

CONCRETE





SANDWICH PANEL ROOF

CE

EN 795 Type C
TS 16415 Type C

MAT.



SPAN


Maxi 15 m



R (kN)

>28 kN



+





STANDING SEAM ROOF



MEMBRANE ROOF

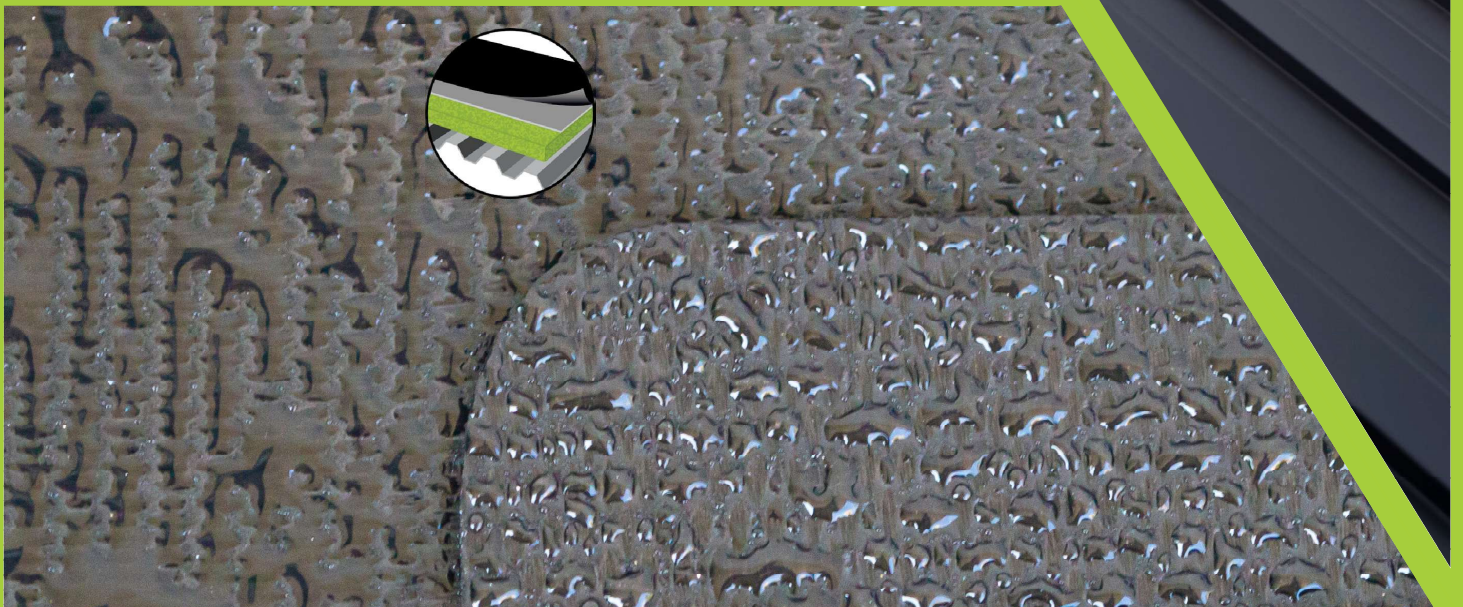

**PLATINE D'EXTRÉMITÉ / EXTREMITY PLATE / PLACA DE EXTREMO /
PIASTRE DI ESTREMITÀ / ABSCHLUSSPLATTEN**

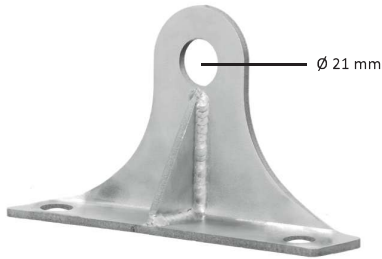


REF.	FA 60 201 01
CE	EN 795 Type A; TS 16415 Type A EN 795 Type C; TS 16415 Type C
MAT.	SNOX 316
DIM.	H : 100 mm 172 x 39 mm
	2 x M12
MBS (kN)	30 kN
	0.53 kg

**ABSORBEUR D'ÉNERGIE / ENERGY ABSORBER / ABSORBEDOR DE ENERGÍA /
ASSORBITORE DI ENERGIA / FALLDÄMPFER**



REF.	FA 60 202 01
CE	EN 795 Type C ; TS 16415 Type C
MAT.	SNOX 316
DIM.	258 x 81 mm
	1.53 Kg

INTERMÉDIAIRES / INTERMEDIATES / INTERMEDIOS / INTERMEDI / ZWISCHENPLATTE

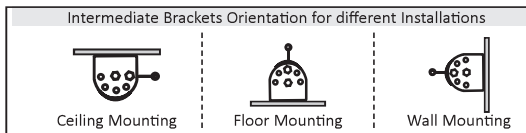

REF.	FA 60 204 00	FA 60 204 01
CE	EN 795 Type C ; TS 16415 Type C	
MAT.	SNOX 316	
SPAN	Maxi every 15 m	
DIM.	H : 120 mm 80 x 60 mm	H : 75 mm 53 x 45 mm
	1 x M12	
	0.57 Kg	0.25 kg
+	Reclining	---

**MARQUAGE / MARKING / MARCADO /
MARCATURA / MARKIERUNG**

		689 CHEMIN DU BUCLAY LIEU-DIT LA MURIÈRE 38540 HEYRIEUX - FRANCE TEL : +33 (0)4 72 48 78 27	
INSTALLED BY			
PRODUCT / SYSTEM			
STANDARD / NORM			MAXIMUM NUMBER OF USERS:
BATCH AND YEAR OF MANUFACTURE			
LENGTH (in M)	CLEARANCE:		
INSTALLATION DATE / REFERENCE			
ACCEPTANCE DATE			
INSPECTION DATE			

REF.	FA 20 902 00
MAT.	ALU
DIM.	100 x 80 mm



TERMINAISON DE CABLE / CABLE TERMINATION / TERMINACIÓN DEL CABLE / TERMINAZIONE DEL CAVO / KABELABSCHLUSS



REF.	FA 60 205 00	FA 60 205 02	FA 60 205 03	FA 60 205 04
CE	EN 795 Type C ; TS 16415 Type C	EN 795 Type C ; TS 16415 Type C	EN 795 Type C ; TS 16415 Type C	EN 795 Type C ; TS 16415 Type C
MAT.	INOX 316	INOX 316	ALU	INOX 316
Kg	0.50 Kg	0.99 kg	0.13 kg	0.39 kg

TENDEURS / TENSIONERS / TENSORES / TENDITORI / SPANNER



REF.	FA 60 203 00	FA 60 203 02	FA 60 203 04
CE	EN 795 Type C ; TS 16415 Type C	EN 795 Type C ; TS 16415 Type C	EN 795 Type C ; TS 16415 Type C
MAT.	INOX 316	INOX 316	INOX 316
Kg	1.00 Kg	1.10 kg	1.13 kg
+	Tension indicator	Tension indicator	Tension indicator

CÂBLE / CABLE / CABLE / CAVO / SEIL

TERMINAISON USINE / FACTORY TERMINATION
/ TERMINACIÓN EN FÁBRICA / TERMINAZIONE IN
FABBRICA / FABRIKTERMINIERUNG



7X19



1X19



REF.	FA 20 200 99	FA 60 290 99
MAT.	INOX	INOX
	7 x 19 Ø 8 mm	1 X 19 Ø 8 mm
R (kN)	36 kN	44 kN
	0.28 Kg/m	0.31 Kg/m


REF.	FA 20 200 98
MAT.	INOX
LG.	1 st m
R (kN)	36 kN
+	Compatible FA 20 200 99

INTERMÉDIAIRE / INTERMEDIATE / INTERMEDIO / INTERMEDIO / ZWISCHENPLATTEN

INSTALLATION AU SOL / FLOOR -
MOUNTING / INSTALACIÓN EN EL SUELO /
INSTALLAZIONE A TERRA /
BODENMONTAGE

INSTALLATION EN INTERIEUR DE MUR / INTERNAL
WALL MOUNTING / INSTALACIÓN INTERIOR DE
PARED / INSTALLAZIONE INTERNO AL MURO /
INSTALLATION INNENECKE WANDMONTAGE

INSTALLATION EN EXTERIEUR DE MUR /
EXTERNAL WALL MOUNTING / INSTALACIÓN
EXTERIOR DE PARED / INSTALLAZIONE ESTERNO
AL MURO / INSTALLATION AUßENECKE WAND-
MONTAGE

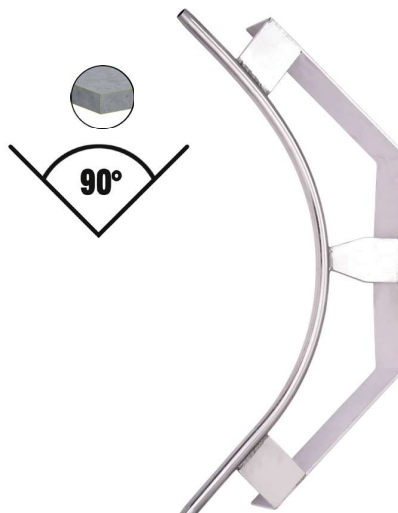

REF.	FA 60 216 90	FA 60 217 90	FA 60 218 90
	EN 795 Type C ; TS 16415 Type C	EN 795 Type C ; TS 16415 Type C	EN 795 Type C ; TS 16415 Type C
MAT.	INOX 316	INOX 316	INOX 316
	1 x M12	2 x M12	2 x M12
	0.81 Kg	1.00 kg	1.00 kg



CAPUCHON DE CÂBLE / WIRE ROPE CAP / TAPA DE CABLE / TAPPO PER CAVO / DRAHTSEILKAPPE



REF.	FA 20 200 97
MAT.	ALU

JONCTION DE CABLE / CABLE JOINT / JUNTA DEL CABLE / GIUNTO PER CAVI / KABELVERBINDUNG



REF.	FA 60 200 97
MAT.	INOX
DIM.	L : 220 mm
	Only for 7x19 (FA 20 200 99)
R (kN)	36 kN
Kg	0.15 kg

CONNECTEUR / CONNECTOR / CONNECTOR / CONNETTORE / VERBINDUNGSELEMENT



REF.	FA 50 305 16
CE	EN 362 Class B
	23 kN / 16.5 mm
MAT.	INOX
	Triple Action
Kg	0.21 Kg
+	Individual Number

COULISSEAUX / CARRIAGE BODIES / CORREDERAS / CARRELLINI / LAÜFER



REF.	FA 60 206 00	FA 60 206 01	FA 60 206 02	FA 60 206 03	FA 70 023 01
CE	EN 795 Type B	EN 795 Type B	EN 795 Type B	EN 795 Type B	EN 12278
	x1	x1	x1	x1	x1
MAT.	INOX 316	INOX 316	INOX 316	INOX 316	INOX 316
MBS (kN)	23 kN	15 kN	25 kN	15 kN	45 kN
Kg	0.64 Kg	1.42 kg	0.21 kg	1.42 kg	0.35 kg
+	Pass through	Easy Overhead usage, Pass through	Pass through	Easy Overhead usage, Pass through	Easy Overhead usage

FA 90 203 00



FA 60 201 01
(X2)



FA 60 205 02

READY TO
USE KIT
FA 60 200 00
FOR
UP TO 15 M

FA 60 202 01

FA 60 203 02



FA 20 902 00



FA 20 200 98
+
FA 20 200 99
(15 M)

		689 CHEMIN DU BUCLAY LIEU-DIT LA MURIÈRE 38540 HEVRIEUX - FRANCE TEL : +33 (0)4 72 48 78 27		CE	
INSTALLED BY					
PRODUCT / SYSTEM					
STANDARD / NORM					
BATCH AND YEAR OF MANUFACTURE					
LENGTH (in M)		CLEARANCE:		MAXIMUM NUMBER OF USERS:	
INSTALLATION DATE / REFERENCE					
EXPIRY DATE					



FA 90 203 00



FA 60 201 01 (X2)



FA 60 202 01




READY TO USE KIT

FA 20 902 00

		689 CHEMIN DU BUCLAY LIEU-DIT LA MURIERE 38540 HEVRIEUX - FRANCE TEL : +33 (0)4 72 48 78 27		CE
INSTALLED BY				
PRODUCT / SYSTEM				
STANDARD / NORM				
BATCH AND YEAR OF MANUFACTURE				
LENGTH (in M)	CLEARANCE:			
INSTALLATION DATE / REFERENCE				
ACCEPTANCE DATE				
INSPECTION DATE				

FA 60 200 01 FOR UP TO 30 M



FA 60 203 02



FA 20 204 00



FA 60 205 02



FA 20 200 98 + FA 20 200 99 (30 M)