




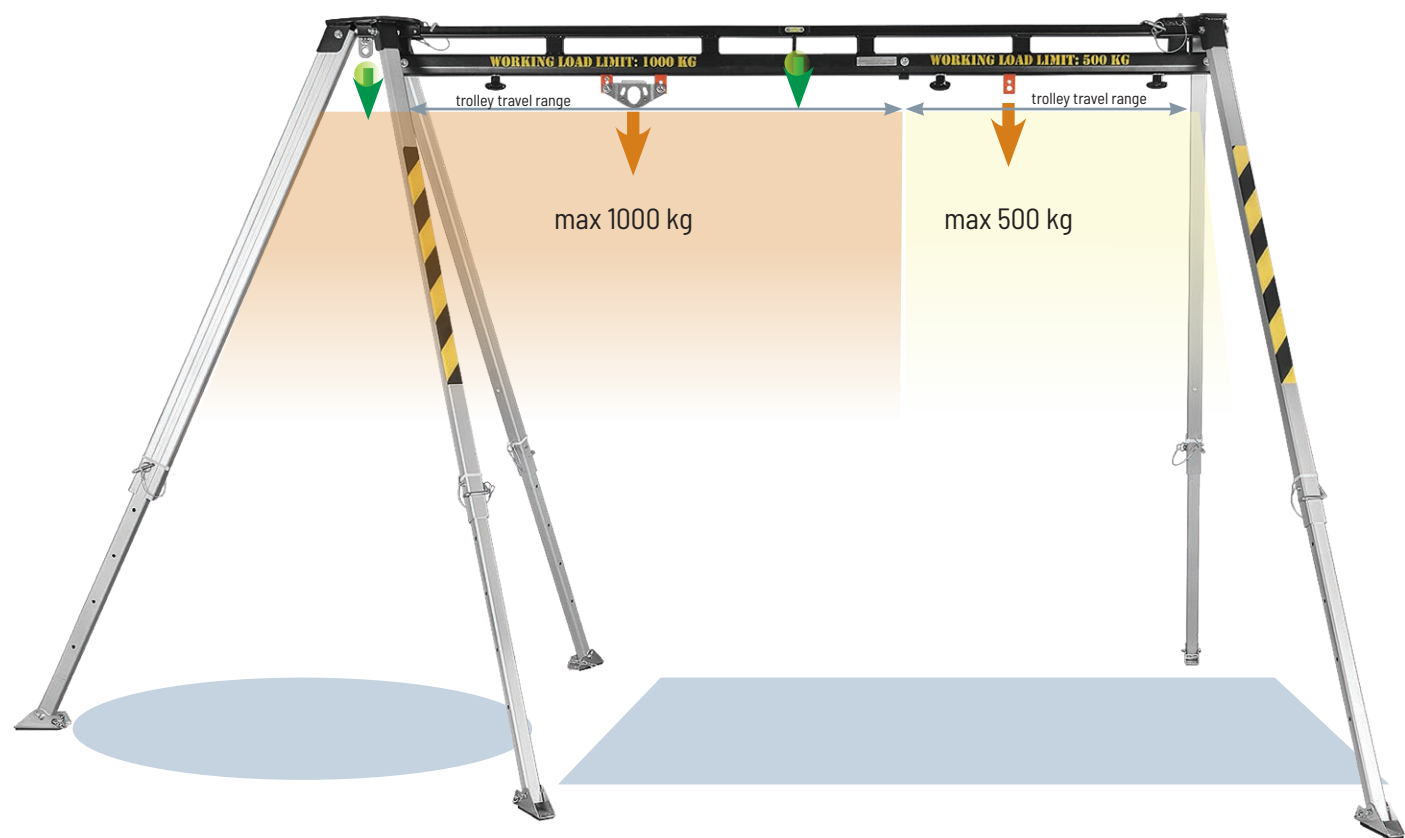


TM 12-SPIDER



Height:	139 - 221 cm
Opening diameter under tripod:	150 - 223 cm
Tripod spacing:	139 - 191 cm
Spacing of the complete device:	325 - 368 cm
Beam weight:	30 kg
Beam length:	230 cm
Device weight:	76 kg
Maximum permissible load:	1000 kg
Lift / Lowering for:	max. 2 persons
Fixed anchor points:	4
Movable anchor points:	2
Transport dimensions:	254 x 33 x 33 cm



Steel trolley travelling along the beam is a movable anchor point which can be locked in a fixed position. The point withstands loads of up to 1000 kg or enables lifting/lowering of 1 person.



Steel trolley travelling along the beam is a movable anchor point which can be locked in a fixed position. The point withstands loads of up to 500 kg.



The tripod's beam is made of powder coated galvanized steel, and has 2 permanent anchor points for person handling the tripod. The beam is equipped with a level indicating whether the device is set properly.



The tripod's head is made of powder coated galvanized steel. It is equipped with an attachment point for a pulley and an additional anchor point for attaching of person handling the tripod.



The tripod's legs are made entirely of aluminium, and feature 7-step adjustment for flexible adaptation of the device's height to desired conditions.




Anti-slip tripod's foot can be adjusted to slippery surfaces.



The tripod's legs can be secured with a light textile webbing or a heavier steel chain.

PERSONNEL AND MATERIAL COMBO TRIPODS

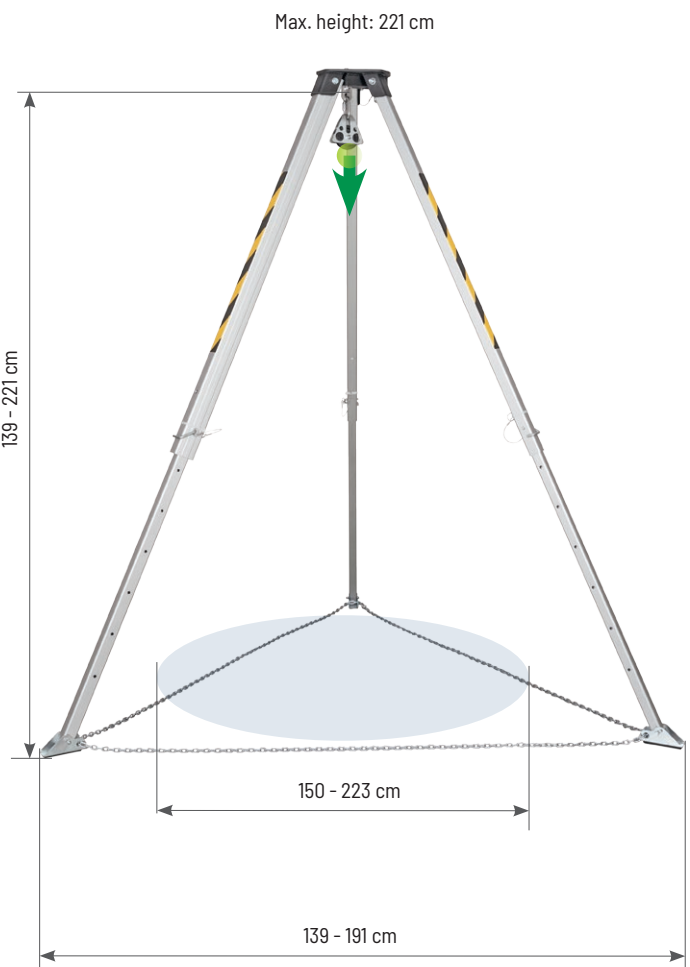


EXTENDED VARIANT - WORK COMBO TRIPOD

Height:	139 - 221 cm
Opening diameter under tripod:	150 - 223 cm
Tripod spacing:	139 - 191 cm
Device weight:	72 kg
Lift / Descent for:	max. 1 person
Fixed anchor points:	2
Maximum permissible load:	1000 kg



EN 795/B:2012
TS 16415/B:2013



Max. 2 persons or
capacity of up to 1000 kg

NORM:

EN 795/B:2012
TS 16415/B:2013



LIFTING AND LOWERING:

Max. 2 persons or
capacity of up to 1000 kg



COMPATIBLE WITH :

RUP 502-U
RUP 503-U
RUP 504
RUP 505-U
RUP 506
CRW 200
CRW 300

DESCRIPTION OF DEVICE:

TM 12 SPIDER is a personnel and material device equipped with 2 movable and 4 fixed anchor points. With the system TM 12 Spider it is possible to use the left tripod as an independent work tripod for handling materials or lifting and lowering personnel.