


Flexible HWDB 2 R

according to EN 360:2002, ANSI Z359.14-2014, CSA Z259.2.2-98




Swivel eye attachment point

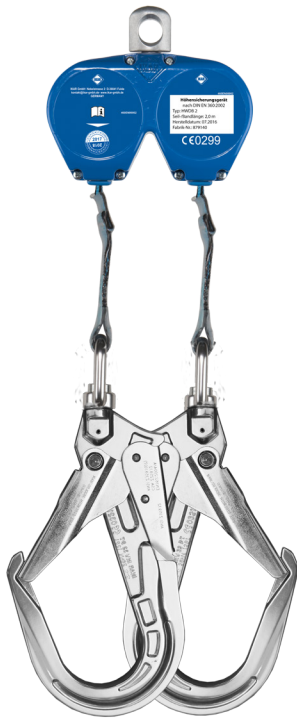

IKV 32W (ANSI Z.359.1-2007; CSA Z259.12-2011) with fall indicator



Swivel double action hooks (special swivel)

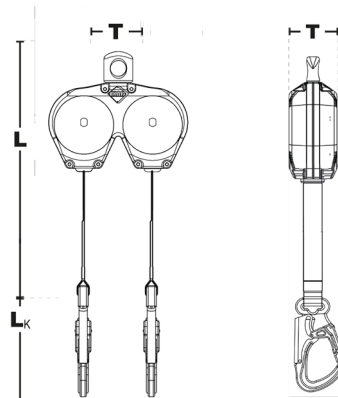

Explanation for the device names:

- H** = Height Safety Device
- W** = Swivel attachment point
- S** = Galvanized steel lifeline
- B** = Webbing lifeline
- P** = Plastic housing
- Number** = Insert length of the device



IKAR height safety devices have been successfully tested in a simulated fall trial over and edge ANSI/ASSE Z 359.14-2014 (r = 0,13 mm) and CNB/P/11.060 (r = 0,5 mm)

Product information:

Order No.:	Application length	Housing	Weight	Dimensions (LxBxT)	Connector (L _K)	
					IKV 21	IKV 32 W
41-HWDB 2R	2 x 2,00 m	Aluminium	2,8 kg	250 x 165 x 60 mm	x	280 mm

Features:

Double-height safety device with internal energy absorber

- Resistant and low-maintenance double-height safety device with swivel eye attachment point
- Or with double attachment (special swivel)
- Robust, seawater-resistant aluminium housing with two Dyneema® webbing lifelines. sewn fall indicator with case indicator
- Standard connector IKV 32 W
- Nominal load: 136 kg
- Temperature range of application: -40°C bis +50°C
- Service life: approx 10 year